


Unit: mm (approx. inch)


## ● Vertical impulse piping type (Installation code -7) \*1

Wetted parts material code: S

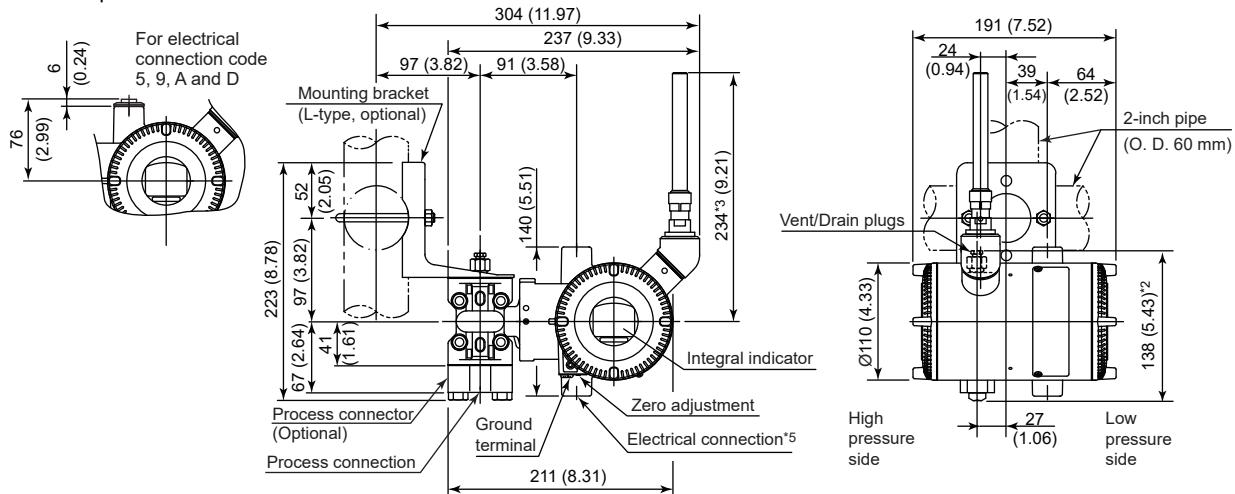

## ● Horizontal impulse piping type (Installation code -9) \*1

Wetted parts material code: S

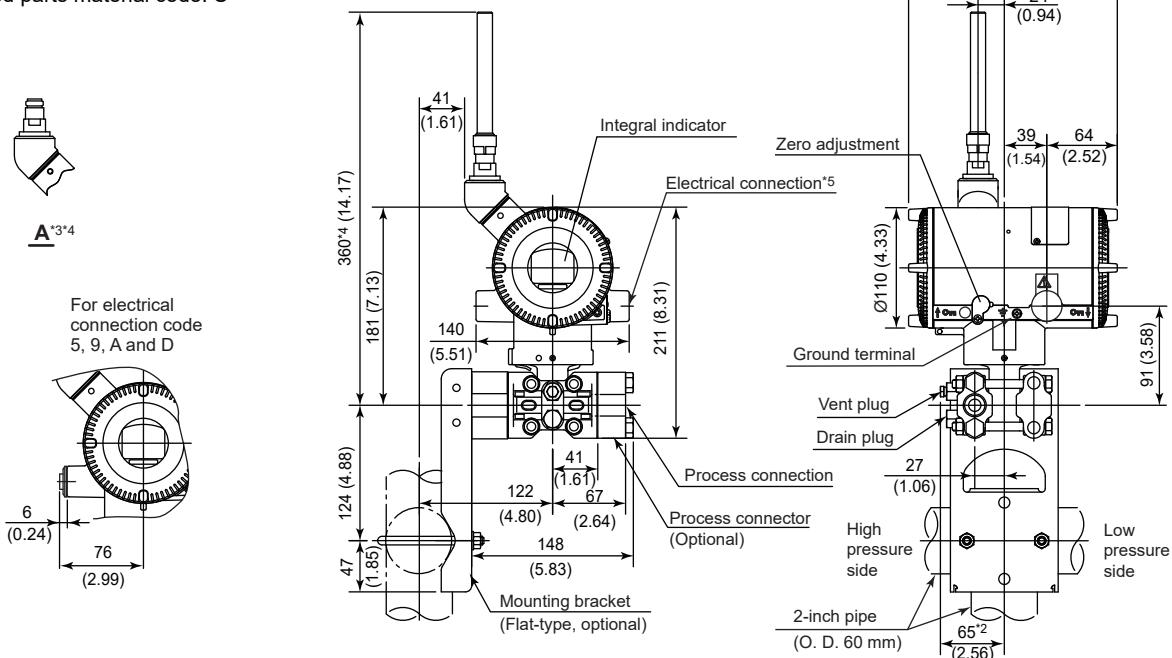

\*1: When installation code -3 and -8 is selected, high and low pressure side on above figure are reversed.  
(i.e. High pressure side is on the right side.)

\*2: When option code K1, K2, K5, or K6 is selected, add 15 mm (0.59 inch) to the value in the figure.


\*3: When amplifier housing code 9 is selected, the value is 114 mm (4.49 inch). In this case, the figure is shown as A.

\*4: When amplifier housing code 9 is selected, the value is 240 mm (9.45 inch). In this case, the figure is shown as A.

\*5: Applicable for the external powered type.

\*6: When electrical connection code 7 or C is selected, a blind plug is protruded upto 8 mm from the electrical connection.

● Infrared Configuration



● Terminal Configuration for the External Powered type

